

Articulated Lamps

PREMIUM LINE



SKU: 289.32.97sd-D4 (silver)

● RAL 9006 / silver



SKU: 289-32.90sd-D4 (black)

● RAL 9005 / black

TECHNICAL DATA


V	220-240
Hz	50-60
W	32
Lm	4080
K	5700
Lux	7300 (40cm)
CRI	> 95 (typ. 97)
kg	4,1
RG	0

Body:	natural-anodised aluminium
Articulation type:	Gas spring arm with 2 integrated gas springs (parallelogram)
Dimming:	Push-button (ON/OFF/DIM) / 1-100%
Lifetime:	50.000h
Warranty:	2 Years
LED Cover:	Microprismatic lens/plus additional high-tech diffuser film
Power connection:	2m PVC-Cable + Schuko plug
LED Driver:	Tridonic
Colour:	Black / Silver
Dimensions light head:	585 x 111 x 35,5 mm (LxWxH)



HIGHLIGHTS

- ✓ No colour location shifts when dimming the LEDs
- ✓ No UV and infrared components in the light spectrum (prevents e.g. premature hardening of plastics)
- ✓ No heat load in the direction of light emission - only slight heating of the luminaire head
- ✓ Extremely bright due to double-row LED arrangement, large-area illumination - up to 7300lx illuminance at 40 cm distance
- ✓ Parallelogram-guided articulated arm with integrated gas struts: infinitely easy to adjust without opening a locking screw, no uncontrolled sagging due to inadvertent misuse

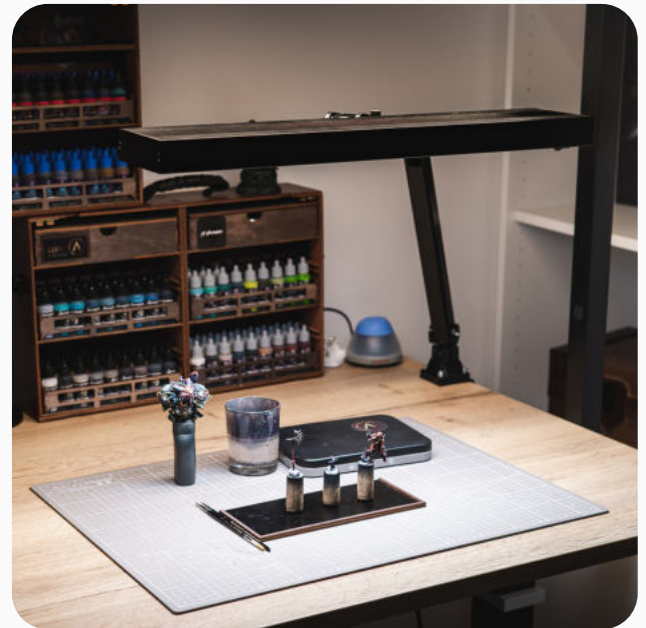

ATTACHMENTS

SKU: 289.32.97sd-D4 (silver)



Screw-on flange (incl.)
SKU: 005.95



Table clamp 0-44 mm
SKU: 003.95



Table clamp 16-85 mm
SKU: 004.95



Tabel base 10,5 kg
SKU: 317.96



Wall angle
SKU: 002.95

SKU: 289-32.90sd-D4 (black)



Screw-on flange (incl.)
SKU: 005.90



Table clamp 0-44 mm
SKU: 003.90



Table clamp 16-85 mm
SKU: 004.90

Posenerstraße 5
83024 Rosenheim
Germany

Sales: +49(0)15156125273
info@rmd-leuchten.de
www.rmd-leuchten.de

