

Articulated Lamps

ALLROUND

12W-VARIANTE

Leuchtenkopflänge: 35,5cm



SKU: 287-L12.97.1 (4000K I nonDIM)

SKU: 287-L12.97.2 (5000K I nonDIM)

SKU: 287-L12.97.1sd (4000K I DIM)

SKU: 287-L12.97.2sd (5000K I DIM)

24W-VARIANTE

Leuchtenkopflänge: 57,7cm



SKU: 287-L24.97.1sd (4000K I DIM)

SKU: 287-L24.97.2sd (5000K I DIM)




RAL 9006 /silber

TECHNICAL DATA

V	220-240
Hz	50-60
W	12 / 24
Lm	2000 / 4000
K	4000 / 5000
Lux	2900 / 4000 (50cm)
CRI	> 80 (typ. 84)
kg	4,3 / 5,0
RG	0
IP	20

Material:	Naturally anodized aluminum
Joint type:	Friction joints with spring support
Arm length:	320 + 445 mm
Dimming:	Non-dimmable / 1-100% dimmable
Service life:	72,000 hours
Warranty:	2 years
LED cover:	Microprismatic lens/plus additional high-tech diffuser film
Power connection:	2 m PVC cable + Schuko plug (CEE 7/7)
Control gear:	LED converter (CC) built-in
Color:	Silver
Light head dimensions:	355 x 98 x 50.5 mm (LxWxH) 577 x 98 x 50.5 mm (LxWxH)

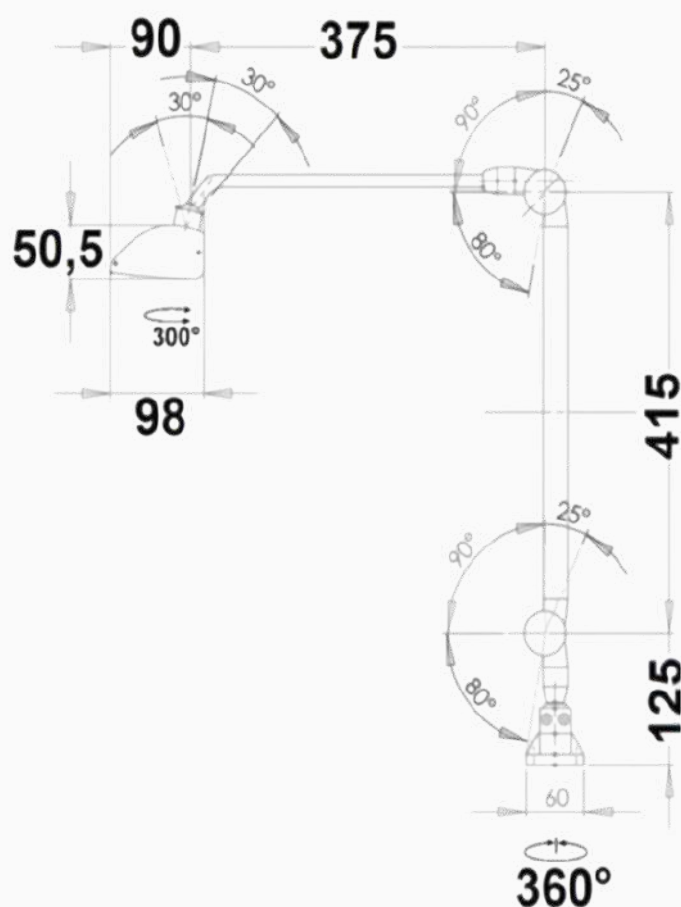

HIGHLIGHTS

- ✓ Universally applicable: Ideal for soldering and testing workstations, precision assembly, manual work, or as a sewing machine lamp.
- ✓ Homogeneous surface lighting: Large luminaire head for uniform illumination and maximum visual comfort.
- ✓ Robust & smooth-running: metal joints enable stepless adjustment, even at low head heights.
- ✓ Flexible & precise: Two articulated arms and a 3D joint for exact positioning without sagging.
- ✓ Individually configurable: Selectable color temperatures (4000 K / 5000 K), dimmable, and with versatile mounting options.



ATTACHMENTS

Für Allround



Screw-on flange (included)
SKU: 00595



Table clamp 0-44 mm
SKU: 00395



Table clamp 16-85 mm
SKU: 00495



Table base 10.5 kg
SKU: 31796



Wall angle
SKU: 00295

Zum Weiherlein 16
97509 Kolitzheim
Germany

Sales: +49(0)15128033591
info@rmd-leuchten.de
www.rmd-leuchten.de

