

Articulated Lamps

BASIC LINE



SKU: 287-L13.952

CRI 95 / 2500 Lux / 5700 Kelvin

SKU: 287-L12.953


CRI 80 / 3700 Lux / 5000 Kelvin

● RAL 9006 /silver

TECHNICAL DATA

V	220-240
Hz	50-60
W	12
Lm	2000 / 4000
K	5000 / 5700
Lux	2500 / 3700 (40cm)
CRI	> 80 (typ. 83) > 90 (typ. 95)
kg	2,8
RG	0

Body:	natural anodised aluminium
Articulation type:	spring-supported articulated arm in middle and foot joint / ball joint at luminaire head
Dimming:	not dimmable
Lifetime:	72.000h
Warranty:	2 years
LED Cover:	microprismatic lens/plus additional high-tech diffuser foil
Power connection:	2m PVC cable + safety plug
LED Driver:	Tridonic
Colour:	Silver
Dimensions light head:	355 x 98 x 50 mm (LxWxH)

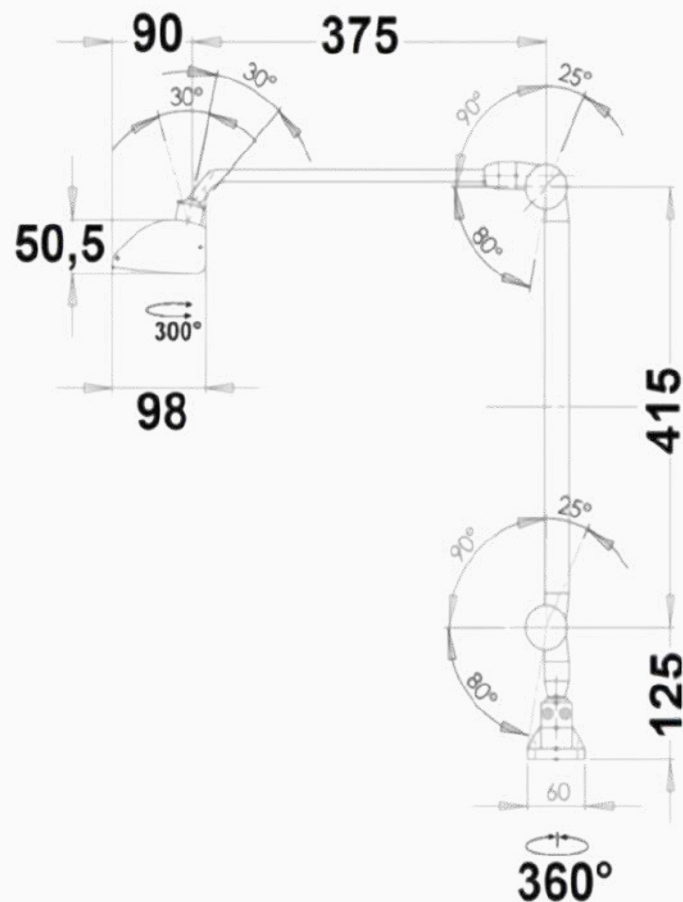

HIGHLIGHTS

- ✓ No colour location shifts when dimming the LEDs
- ✓ No UV and infrared components in the light spectrum (prevents e.g. premature hardening of plastics)
- ✓ No heat load in the direction of light emission - only slight heating of the luminaire head
- ✓ Homogeneous, large-area light due to single-row arrangement of LED modules
- ✓ Compact and robust luminaire housing with a spring-supported articulated arm/ball joint in the middle and foot joint on the luminaire head with a wide range of adjustment



ATTACHMENTS

For Basic Line



Screw-on flange (incl.)
SKU: 005.95



Table clamp 0-44 mm
SKU: 003.95



Table clamp 16-85 mm
SKU: 004.95



Tabel base 10,5 kg
SKU: 317.96



Wall angle
SKU: 002.95

Zum Weiherlein 16
97509 Kolitzheim
Germany

Sales: +49(0)15128033591
info@rmd-leuchten.de
www.rmd-leuchten.de

