

Flex arm luminaires

FLEX MFL



SKU: 268.95.02 (100V - 240V)*



SKU: 268.95.01 (12V - 24V DC)**

-  RAL 9006 /silber (unterer Gelenkarm)
-  RAL 9005 / black (Flexarm)


*normaler Netzanschluss

** für Maschinen

TECHNICAL DATA

V	100-240 AC / 12-24 DC	Material flexible arm/	Sturdy all-metal construction
Hz	50-60	Luminaire head:	Ø 90 x 100 mm
W	4	Control unit:	Integrated LED converter
Lm	350	Dimming:	not dimmable
Lux	> 5000 (50cm)	Articulation type:	Flexible arm (gooseneck) + ankle joint (friction)
K	5000	Lens:	30°
CRI	> 80 (typ. 83)	Lifetime:	50.000h
kg	2,3	Warranty:	2 years
IP	54	LED Cover:	Lamp cover made of toughened safety glass
		Mains connection:	2 m rubber cable
		Plug type:	Without (III) or Schuko (CEE 7/7) (I)
		Colour:	Black, arm silver gray
		Protection class:	III (12-24 V) / I (100-240 V)

Distance:	Illuminance:
150 cm	635 Lux
100 cm	1430 Lux
50 cm	5718 Lux

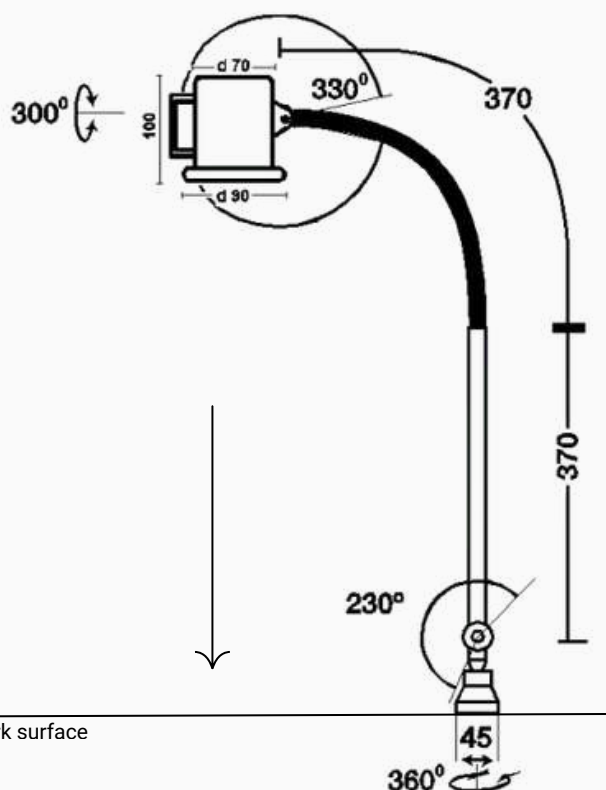

HIGHLIGHTS

- ✓ Variably adjustable light direction thanks to a combination of flexible and articulated arm with additional swivel and tilt joint on the luminaire head.
- ✓ Lamp cover made of toughened safety glass and robust rubber connection cable for dust and splash protection (IP 54).
- ✓ The two variants, 12–24 V DC and 100–240 V, enable connection to machine or mains voltage.
- ✓ Precision instead of scattered light: the 18° spot shines light precisely on details – ideal when contours, edges, and small components are important.



ATTACHMENTS

For FLEX MFL



Aufschraubflansch (inkl.)
SKU: 005.95



Tischklemme 0-44 mm
SKU: 003.95



Tischklemme 16-85 mm
SKU: 004.95



Tischfuß 7,5 kg
SKU: 305-60.96



Wandwinkel
SKU: 002.95

Zum Weiherlein 16
97509 Kolitzheim
Germany

Sales: +49(0)15128033591
info@rmd-leuchten.de
www.rmd-leuchten.de

