

Flex arm luminaires

FLEX MFS



SKU: 275.90.02 (with magnetic base)



SKU: 275.90.02-1 (with flange)



RAL 9005 / schwarz


*600 N Tragkraft

TECHNICAL DATA


V	100-240 AC
Hz	50-60
W	4
Lm	350
Lux	> 5000 (50cm)
K	5000
CRI	> 80 (typ. 83)
kg	2,2 / 2,0
IP	54

Material flexible arm/	Sturdy all-metal construction
Luminaire head:	Ø 90 x 100 mm
Control unit:	Integrated LED converter
Dimming:	not dimmable
Articulation type:	Flexible arm (gooseneck), 15.4 inches (11.8 inches flexible)
Lens:	30°
Lifetime:	50.000h
Warranty:	2 years
LED Cover:	Lamp cover made of toughened safety glass
Mains connection:	2 m rubber cable
Plug type:	Schuko (CEE 7/7)
Colour:	black (RAL 9006)
Protection class:	I

275.90.02 (mit Magnetfuß)

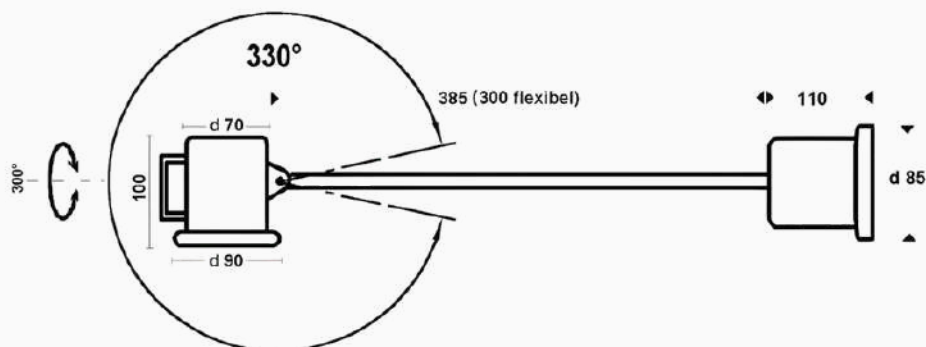


275.90.02-1 (mit Flansch)

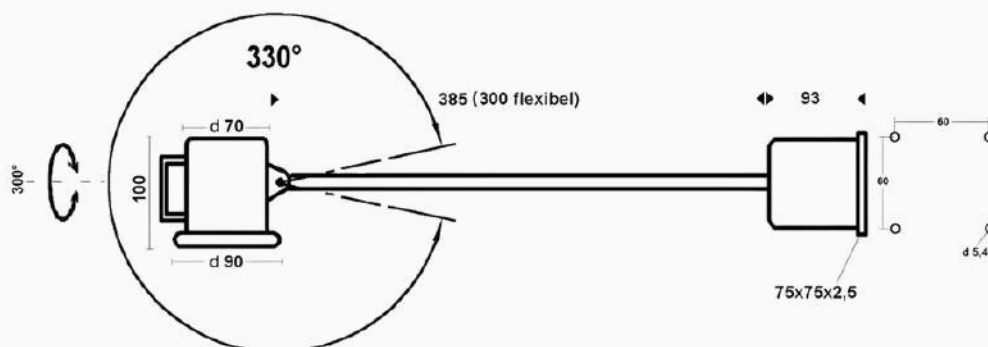

HIGHLIGHTS

- ✓ Quick and flexible light positioning thanks to robust metal spiral hose with plastic coating, additional swivel joint, and handle on the lamp head.
- ✓ Lamp cover made of toughened safety glass - temperature and change resistant. Robust rubber connection cable for dust and splash protection (IP 54).
- ✓ High vibration and shock resistance thanks to robust flexible arm. Universally applicable as a machine light in industry.
- ✓ Precision instead of scattered light: the 18° spot shines light precisely on details – ideal when contours, edges, and small components are important.

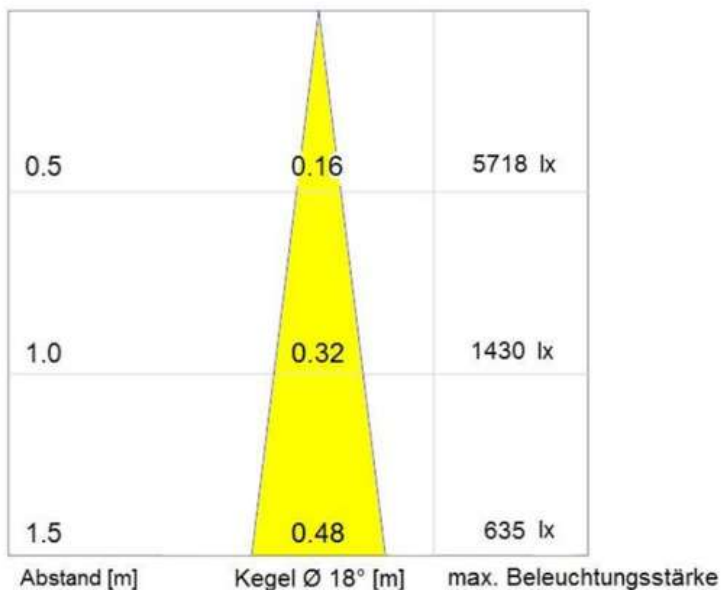

ATTACHMENTS

For FLEX MFS



Screw-on flange (incl.)
SKU: 275.90.02-1



Magnetic base (incl.)
SKU: 275.90.02



Wall angle*
SKU: 006.90



Table clamp*
SKU: 007.90

**for version with flange*

ON REQUEST



Connection: 12-24V DC
for machines

Zum Weiherlein 16
97509 Kolitzheim
Germany

Sales: +49(0)15128033591
info@rmd-leuchten.de
www.rmd-leuchten.de

