

Flex arm luminaires

FLEX PRO



SKU: 614.90-1d


● RAL 9006 / lamp-head

● RAL 9005 / flex arm

TECHNISCHE DATEN

V	100-240
Hz	50-60
W	14
Lm	1870
K	5000
Lux	1750 (50cm)
CRI	> 80 (typ. 83)
kg	1,7

Material luminaire head:	Anodised aluminium profile with end caps made of impact-resistant plastic
Articulated type:	Flexible arm (gooseneck)
Dimming:	Rotary potentiometer - dimming (5 - 100%)
Lifetime:	50.000h
Warranty:	2 years
LED cover:	Grooved prismatic lens
Mains connection:	1.8 m PVC cable Plug-in power supply (Euro plug)
Colour:	Silver (lamp-head) / Black (flex arm)
Protection class:	II
IP code:	IP 20

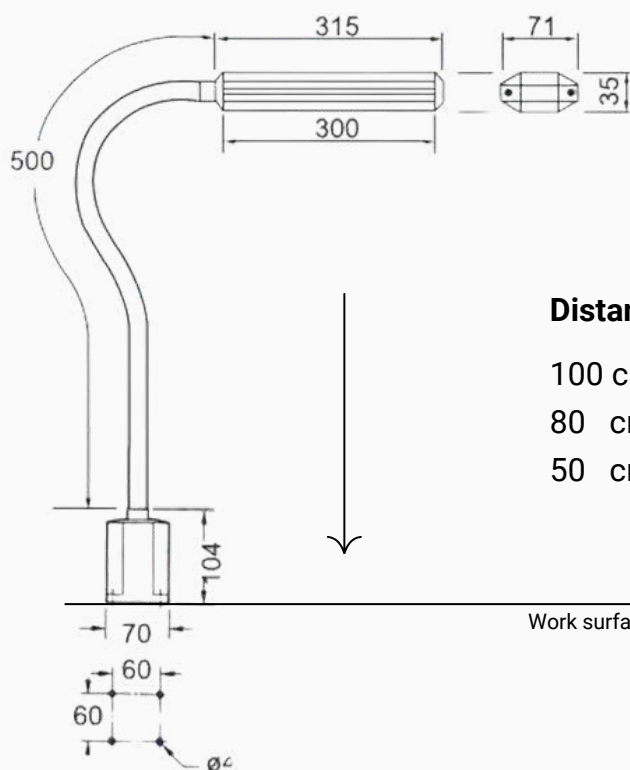

Distance:

100 cm
80 cm
50 cm

Illuminance:

530 Lux
866 Lux
1750 Lux

HIGHLIGHTS

- ✓ A bright, continuously dimmable flexible arm luminaire for machines, work, test and inspection stations with normal ambient conditions.
- ✓ Luminaire head made of anodised aluminium with end caps made of impact-resistant plastic
- ✓ Robust, quickly and stably alignable flexible arm made of metal with shrink tubing cover
- ✓ Rotary potentiometer for infinitely variable dimming of the light intensity in the luminaire base
- ✓ Glare control and homogeneous light distribution through grooved prismatic lens



ATTACHMENTS

For Flex Pro



Screw-on flange (incl.)



Table clamp 0-44 mm
SKU: 007.90



Magnetic base
SKU: 008.90



Wall angle
SKU: 006.90

Zum Weiherlein 16
97509 Kolitzheim
Germany

Sales: +49(0)15128033591
info@rmd-leuchten.de
www.rmd-leuchten.de

