


Pendant lights

PREMIUM P41/54


Steel cable suspension
individually shortenable

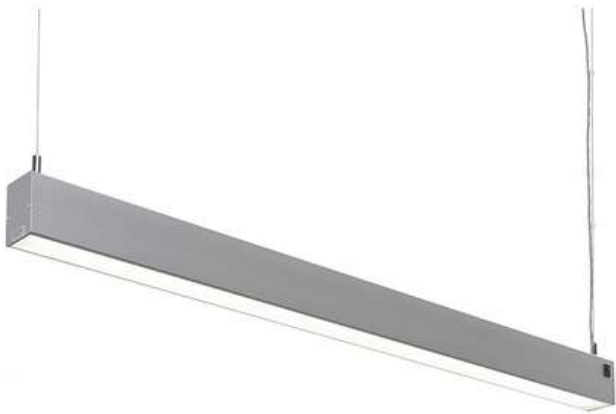

SKU: 559.40.96tw/sd (87cm)

SKU: 559.52.96tw/sd (115cm)

Drawbar suspension
50 - 150cm (height adjustable)

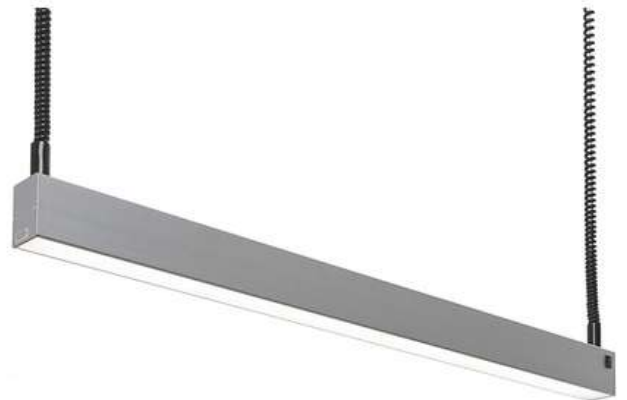

SKU: 559.40tw/sd (87cm)

SKU: 559.52tw/sd (115cm)

● RAL 9006 /silver

TECHNICAL DATA

V 220-240
Hz 50-60
W 41 / 54
K 2700-6500
Lux 5400 (50cm)
CRI > 90 (typ. 93)
kg 3,3 / 4,7
RG 0

Material: extruded aluminium
Dimming: dimmable 1-100%
Lifetime: 50.000h
Warranty: 2 years
Colour change: Colour temperature in 9 steps from 2700K warm white to 6500K daylight white
LED cover: Microprismatic lens/plus additional high-tech diffuser foil
Mains connection: luster terminals in right-hand canopy
LED Driver: Tridonic
Colour: Silver
Dimensions: 870 x 60 x 79 mm (LxWxH)
1150 x 60 x 79 mm (LxWxH)



Steps:	Colour change:
1	2500 K
2	3000 K
3	3500 K
4	4000 K
5	4500 K
6	5000 K
7	5500 K
8	6000 K
9	6500 K

HIGHLIGHTS

- ✓ No colour location shifts when dimming the LEDs
- ✓ No UV and infrared components in the light spectrum (prevents e.g. premature hardening of plastics)
- ✓ No heat load in the direction of light emission - only slight heating of the luminaire surface
- ✓ Colour change in 9 steps - from 2500 to 6500 Kelvin. Optimal for users who want to work with different colour temperatures.
- ✓ Optical design package: also available with filigree steel cable suspensions and transparent insulated supply cable (not infinitely height-adjustable)



Zum Weiherlein 16
97509 Kolitzheim
Germany

Sales: +49(0)15128033591
info@rmd-leuchten.de
www.rmd-leuchten.de

