

Articulated Lamps

PRO LINE



SKU: 289-24.97.957sd (24W)



SKU: 289-24.90.957sd (24W)



SKU: 289-12.97.957sd (12W)



SKU: 289-12.90.957sd (12W)



RAL 9006 / silver



RAL 9005 / black

TECHNICAL DATA


V	220-240
Hz	50-60
W	12 / 24
Lm	1400 / 2800
K	5700
Lux	3000 / 4700 (40cm)
CRI	> 95 (typ. 97)
kg	3,1 / 3,5
RG	0

Body:	natural-anodised aluminium
Articulation type:	spring-supported articulated arm in the middle and ankle joint
Dimming:	Push-button (ON/OFF/DIM) / 1-100%
Lifetime:	50.000h
Warranty:	2 Years
LED Cover:	Microprismatic lens/plus additional high-tech diffuser film
Power connection:	2m PVC-Cable + Schuko plug
LED Driver:	Tridonic
Colour:	Silver
Dimensions light head:	12W: 350 x 111 x 35,5 mm (LxWxH) 24W: 585 x 111 x 35,5 mm (LxWxH)



HIGHLIGHTS

- ✓ No colour location shifts when dimming the LEDs
- ✓ No UV and infrared components in the light spectrum (prevents e.g. premature hardening of plastics)
- ✓ No heat load in the direction of light emission - only slight heating of the luminaire head
- ✓ Homogeneous, large-area light due to single-row arrangement of LED modules
- ✓ Compact and robust luminaire housing with a spring-supported articulated arm in the middle and foot joint / 3-D joint on the luminaire head with large adjustment range

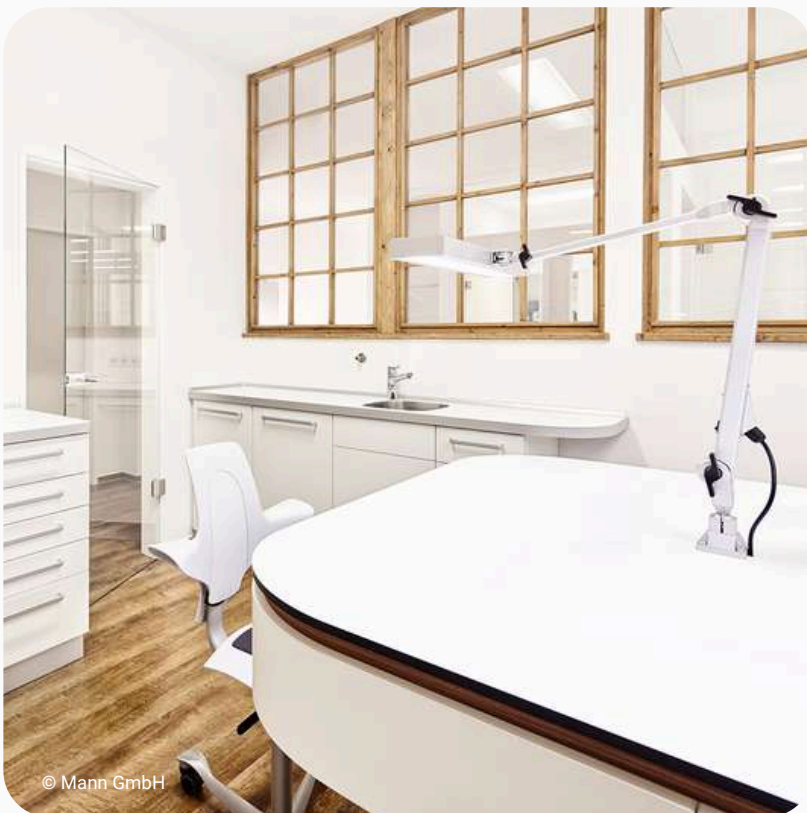

ATTACHMENTS

SKU: 289-12.97.957sd (12W)



SKU: 289-24.97.957sd (24W)



Screw-on flange (incl.)
SKU: 005.95



Table clamp 0-44 mm
SKU: 003.95



Table clamp 16-85 mm
SKU: 004.95



Tabel base 10,5 kg
SKU: 317.96



Wall angle
SKU: 002.95

SKU: 289-12.90.957sd (12W)



SKU: 289-24.90.957sd (24W)



Screw-on flange (incl.)
SKU: 005.90



Table clamp 0-44 mm
SKU: 003.90



Table clamp 16-85 mm
SKU: 004.90

Zum Weiherlein 16
97509 Kolitzheim
Germany

Sales: +49(0)15128033591
info@rmd-leuchten.de
www.rmd-leuchten.de

