

Floor lamp

STANDARD



● RAL 9005 / black


● RAL 9006 / silver

○ RAL 9016 / white

TECHNICAL DATA

V	220-240
Hz	50-60
W	76
Lm	7600
K	4000
CRI	80
kg	17,1

Material:	Aluminum
Insert:	Mobile
Dimming:	Dimmable
Operation:	Infrared motion detector, touch display
Service life:	50.000 h
Warranty:	5 years
Light outlets:	direct/indirect
Half beam angle:	80°/110°
UGR:	UGR < 19
Stroboscopic effect:	0
Risk group:	RG 0
Color:	White, silver, black
Dimensions:	692 x 310 x 1950 mm (LxWxH)

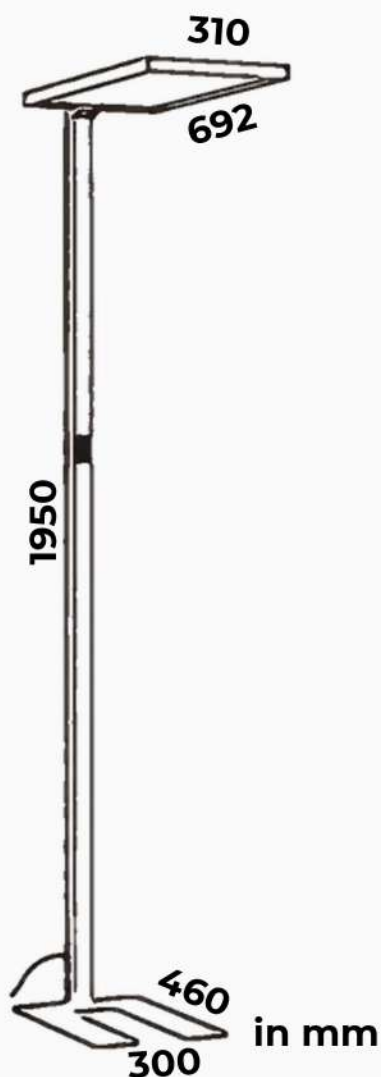

HIGHLIGHTS

- ✓ Equipped with powerful LEDs and a $UGR \leq 19$, ideal for VDU workstations.
- ✓ Integrated motion sensor, daylight control and dimmability for flexible office lighting.
- ✓ Uniformly bright room illumination thanks to indirect light component for pleasant and glare-free working.
- ✓ Sustainable & durable: energy-efficient and low-maintenance solution for long-term use.
- ✓ Simple installation - standard 230 V connection, mobile use.



Zum Weiherlein 16
97509 Kolitzheim
Germany

info@rmd-leuchten.de
www.rmd-leuchten.de

