
LED pendant luminaire

Basic Line Eco P36

Individually adjustable lighting with outstanding light quality and modern design.

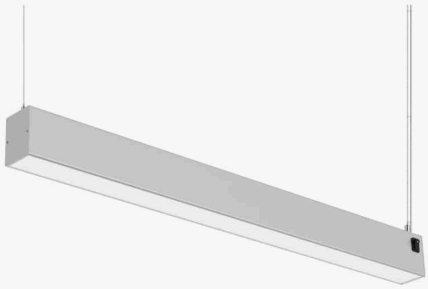

COLOUR RENDERING
CRI 99 · R9 98


LIGHT COLOUR
5,700 K

ILLUMINANCE
4,500 lx
at 50 cm

SERVICE LIFE
102,000 h

Length 870 mm

4,200 lm · 36 W



Basic Line Eco P36

non-dimmable · rise-and-fall pendant	55936957S
non-dimmable · steel cable	5593696957S
dimmable · rise-and-fall pendant	55936957sd
dimmable · steel cable	5593696957sd

Length 1950 mm

8,400 lm · 72 W



Basic Line Eco P36

non-dimmable · rise-and-fall pendant	55972957S
non-dimmable · steel cable	5597296957S
dimmable · rise-and-fall pendant	55972957sd
dimmable · steel cable	5597296957sd

Technical data

Values per length. Values shaded grey apply to every version, otherwise they depend on the version.

	LENGTH **870 mm** 36 W	LENGTH **1950 mm** 72 W
Item no. per version		
non-dimmable · rise-and-fall pendant	55936957S	55972957S
non-dimmable · steel cable	5593696957S	5597296957S
dimmable · rise-and-fall pendant	55936957sd	55972957sd
dimmable · steel cable	5593696957sd	5597296957sd
Light		
Luminous flux	4,200 lm	8,400 lm
Illuminance (50 cm)	4,500 lx	
Colour temperature	daylight white (5700 Kelvin)	
Colour rendering	CRI 99 / R9 98	
Dimming	non-dimmable / 1-100 % stepless	
Power	36 W	72 W
Design & material		
Dimensions (L × W × H)	870 × 60 × 79 mm	1950 × 60 × 79 mm
Weight	3.9 kg	6.2 kg
Colour	Silver grey RAL 9006	
Technology		
Supply voltage	220-240 V / 50-60 Hz	
Service life	102,000 h (L80/B10)	
Protection class	IP 20	
Risk group	RG 0	
Operation, connection & mounting		
Switch	Multifunction button (ON/OFF/Dim and mode selection) / button on the side of the luminaire head	
Connection	Terminal blocks in the right ceiling canopy	
Mountings	depending on the selected option: height-adjustable rise-and-fall pendants 500-1500 mm or individually shortenable steel cable suspension	
Suspension	height-adjustable rise-and-fall pendants (black) / steel cable suspension	

Highlights

COLOUR RENDERING

CRI 99 R9 98

Colours as in daylight, including strong red. R9 is the value for saturated red and is not part of the CRI value. With many LEDs it is considerably lower.

LED SERVICE LIFE

102,000 h

Calculated 51 years at 8 hours on 250 working days per year.

Clear design

High-quality materials that suit any room.

Bright into the corners

Light at the workplace and brightening of the whole room.

Less glare

The micro-prism diffuser with diffuser film distributes the light evenly and with low glare.

Everything under control

Multifunction button (ON/OFF/Dim and mode selection), button on the side of the luminaire head.

At the right height

Height-adjustable rise-and-fall pendants 500-1500 mm or steel cable suspension that can be shortened individually.


Slim in the room

We adapt the length individually to the size of your room.

Dimensions


All dimensions in mm.

CROSS-SECTION

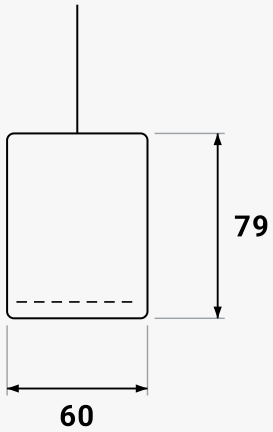

ght output at the bottom


LENGTH 870 MM · 36 W

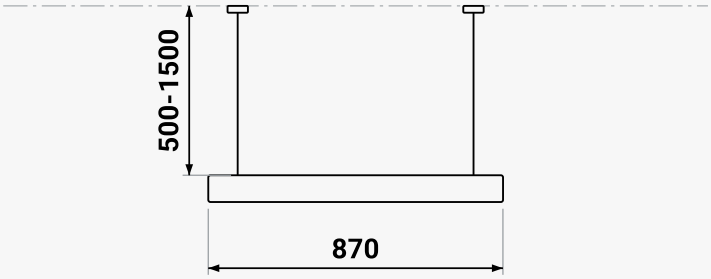

Rise-and-fall pendant 500-1500 mm or steel cable, can

LUMINAIRE (L × W × H)	WEIGHT
870 × 60 × 79 mm	3.9 kg

LENGTH 1950 MM · 72 W

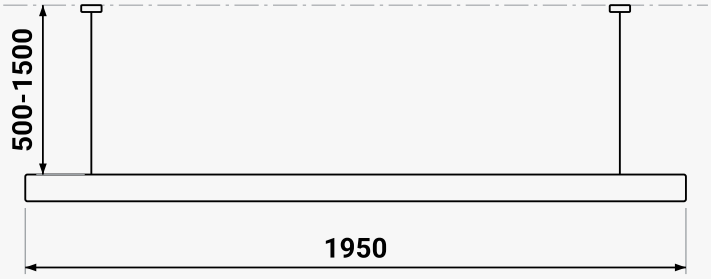

Rise-and-fall pendant 500-1500 mm or steel cable, can

LUMINAIRE (L × W × H)	WEIGHT
1950 × 60 × 79 mm	6.2 kg

Scope of delivery: selected suspension, LED light source

Contact

Questions about the pendant luminaire Basic Line Eco P36?

We advise you personally, including lighting design for your workplace.

PHONE
+49 9723 9082788

EMAIL
info@rmd-leuchten.de

ADDRESS
Zum Weiherlein 16
97509 Kolitzheim, Germany

OPENING HOURS
Mon - Fri 9:00 am - 6:00 pm (CET)

PRODUCT PAGE OPEN