
LED pendant luminaire

Black Line Basic Eco P36

Modern design, glare-free light and CRI 99 for true-colour precision.

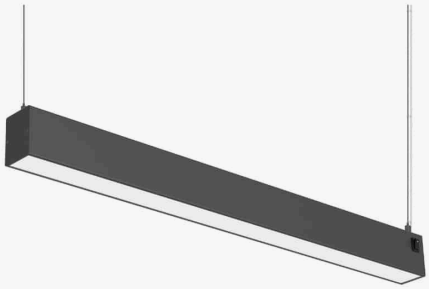

COLOUR RENDERING
CRI 99 · R9 98


LIGHT COLOUR
5,700 K

ILLUMINANCE
4,500 lx
at 50 cm

SERVICE LIFE
102,000 h

Length 870 mm

4,200 lm · 4,500 lx · 36 W



Black Line Basic Eco P36	
non-dimmable · rise-and-fall pendant	5593690957S
non-dimmable · steel cable	5593691957S
dimmable · rise-and-fall pendant	5593690957sd
dimmable · steel cable	5593691957sd

Technical data

LENGTH
870 mm
36 W

Item no. per version

non-dimmable · rise-and-fall pendant	5593690957S
non-dimmable · steel cable	5593691957S
dimmable · rise-and-fall pendant	5593690957sd
dimmable · steel cable	5593691957sd

Light

Luminous flux	4,200 lm
Illuminance (50 cm)	4,500 lx
Colour temperature	daylight white (5700 Kelvin)
Colour rendering	CRI 99 / R9 98
Dimming	non-dimmable / 1-100 % stepless
Power	36 W

Design & material

Dimensions (L × W × H)	870 × 60 × 79 mm
Weight	3.9 kg
Colour	Black RAL 9005

Technology

Supply voltage	220-240 V / 50-60 Hz
Service life	102,000 h (L80/B10)
Protection class	IP 20
Risk group	RG 0

Operation & mounting

Switch	Multifunction button (ON/OFF/Dim and mode selection) / button on the side of the luminaire head
Mountings	depending on the selected option: height-adjustable rise-and-fall pendants 500-1500 mm or individually shortenable steel cable suspension
Suspension	height-adjustable rise-and-fall pendants (black) / steel cable suspension

Highlights

COLOUR RENDERING

CRI 99 R9 98

Colours as in daylight, including strong red. R9 is the value for saturated red and is not part of the CRI value. With many LEDs it is considerably lower.

LED SERVICE LIFE

102,000 h

Calculated 51 years at 8 hours on 250 working days per year.

Clear design

High-quality materials that suit any room.

Bright into the corners

Light at the workplace and brightening of the whole room.

Less glare

The micro-prism diffuser with diffuser film distributes the light evenly and with low glare.

Everything under control

Multifunction button (ON/OFF/Dim and mode selection), button on the side of the luminaire head.

At the right height

Height-adjustable rise-and-fall pendants 500-1500 mm or steel cable suspension that can be shortened individually.


Slim in the room

We adapt the length individually to the size of your room.

Dimensions


All dimensions in mm.

CROSS-SECTION

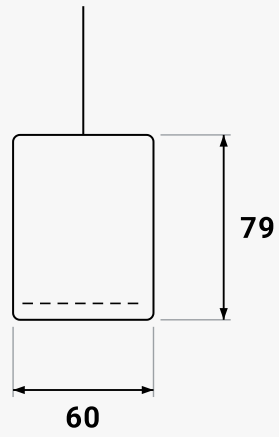

ght output at the bottom

LENGTH 870 MM · 36 W

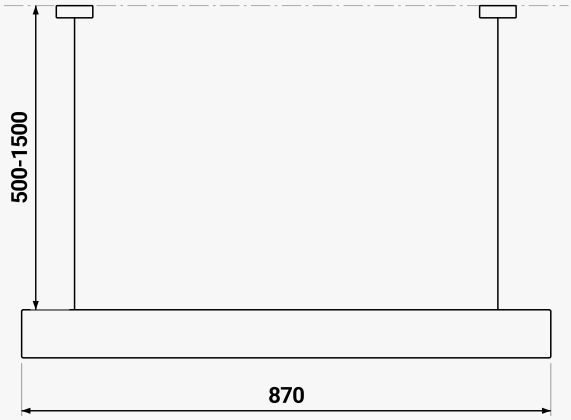

Rise-and-fall pendant 500-1500 mm or steel cable, can be sh

LUMINAIRE (L × W × H)	WEIGHT
870 × 60 × 79 mm	**3.9 kg**

Scope of delivery: selected suspension, LED light source

Contact

Questions about the pendant luminaire Black Line Basic Eco P36?

We advise you personally, including lighting design for your workplace.

PHONE
+49 9723 9082788

EMAIL
info@rmd-leuchten.de

ADDRESS
Zum Weiherlein 16
97509 Kolitzheim, Germany

OPENING HOURS
Mon - Fri 9:00 am - 6:00 pm (CET)

PRODUCT PAGE OPEN