
Office pendant luminaire

Edge

Flexible light, timeless design - for perfect lighting & long-lasting performance.

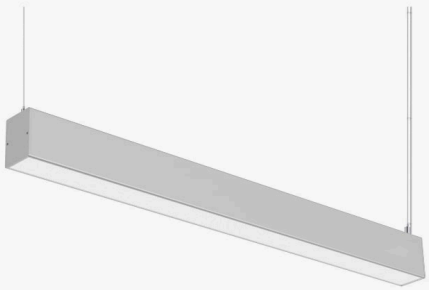

COLOUR RENDERING
CRI > 80

LIGHT COLOUR
4,000 K

SERVICE LIFE
50,000 h

870 mm
3,180 lm · 16.5 W



Edge
ITEM NO. 558-09,840

1150 mm
4,240 lm · 22 W



Edge
ITEM NO. 558-12,840

1435 mm
5,300 lm · 27.5 W



Edge
ITEM NO. 558-15,840

Technical data

Values per length. Values shaded grey apply to every version, otherwise they depend on the version.

	LENGTH 870 mm 16.5 W	LENGTH 1150 mm 22 W	LENGTH 1435 mm 27.5 W
Item no. per version			
Item no.	558-09,840	558-12,840	558-15,840
Light			
Luminous flux	3,180 lm	4,240 lm	5,300 lm
Colour temperature	neutral white (4000 Kelvin)		
Colour rendering	CRI > 80 (typ. 85)		
Power	16.5 W	22 W	27.5 W
Design & material			
Dimensions (L × W × H)	870 × 60 × 79 mm	1150 × 60 × 79 mm	1435 × 60 × 79 mm
Weight	3.5 kg	4.0 kg	4.5 kg
Colour	Silver grey RAL 9006		
Housing material	natural anodised aluminium		
LED cover	Micro-prism diffuser plus additional high-tech diffuser film		
Length	870 mm	1150 mm	1435 mm
Technology			
Supply voltage	220-240 V / 50-60 Hz		
Service life	50,000 h		
Protection class	IP 20		
Risk group	RG 0		
Connection & mounting			
Connection	Terminal blocks in the right ceiling canopy		
Mountings	Steel cable suspension 2.5 m, can be shortened individually		
Suspension	Steel cable suspension		

Highlights

COLOUR RENDERING

CRI > 80

See colours naturally and reliably.

LED SERVICE LIFE

50,000 h

Calculated 25 years at 8 hours on 250 working days per year.

Less glare

Micro-prism diffuser plus diffuser film: even, low-glare light.

Bright into the corners

Light at the workplace and brightening of the whole room.

Made in Germany

Developed and manufactured in Germany.

Flicker-free

Easy on the eyes and increases visual comfort.

Clear design

High-quality materials that suit any room.


Low heat build-up

No heat load in the direction of light output, the luminaire stays cool.

Dimensions


All dimensions in mm.

CROSS-SECTION

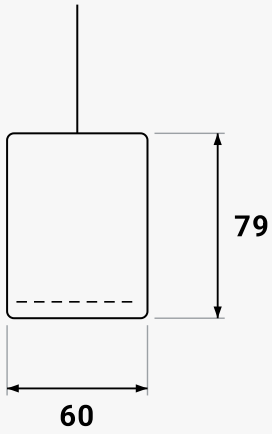


ght output at the bottom

LENGTH 870 MM · 16.5 W

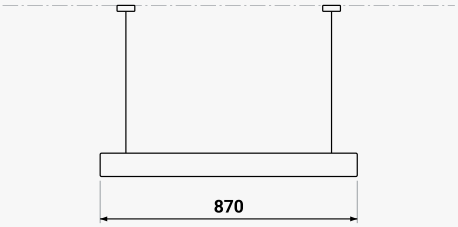


LUMINAIRE (L × W × H)	WEIGHT
870 × 60 × 79 mm	**3.5 kg**

LENGTH 1150 MM · 22 W

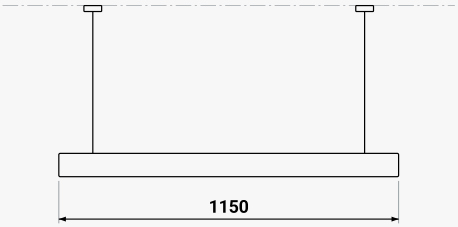

LUMINAIRE (L × W × H)	WEIGHT
1150 × 60 × 79 mm	**4.0 kg**

LENGTH 1435 MM · 27.5 W

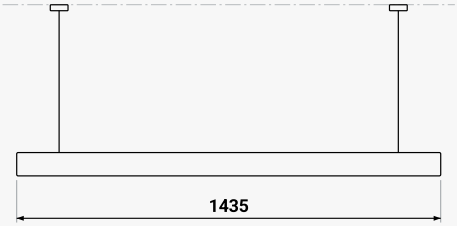

LUMINAIRE (L × W × H)	WEIGHT
1435 × 60 × 79 mm	**4.5 kg**

Scope of delivery: Light source, steel cable suspension, mounting set: 2x ceiling bracket, 1x ceiling canopy with suspension function for various mounting configurations

Contact

Questions about the office pendant luminaire Edge?

We advise you personally, including lighting design for your workplace.

PHONE
+49 9723 9082788

EMAIL
info@rmd-leuchten.de

ADDRESS
Zum Weiherlein 16
97509 Kolitzheim, Germany

OPENING HOURS
Mon - Fri 9:00 am - 6:00 pm (CET)

PRODUCT PAGE OPEN