
Office pendant luminaire

TW

Flexible light, timeless design - for perfect lighting & long-lasting performance.

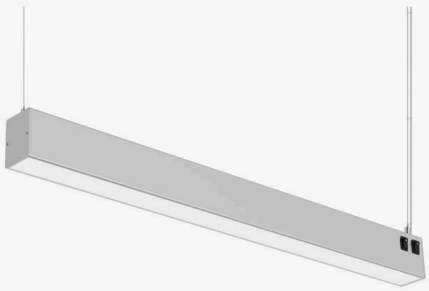

COLOUR RENDERING
CRI > 90

LIGHT COLOUR
2,700-6,500 K

ILLUMINANCE
5,400 lx
at 50 cm

SERVICE LIFE
50,000 h

870 mm
4,500 lm · 30 W



TW

Rise-and-fall pendant	559.40tw/sd
Steel cable	559.4096tw/sd

1150 mm
6,000 lm · 40 W



TW

Rise-and-fall pendant	55941tw/sd
Steel cable	5594196tw/sd

1435 mm
7,500 lm · 50 W



TW

Rise-and-fall pendant	55952tw/sd
Steel cable	5595296tw/sd

Technical data

Values per length. Values shaded grey apply to every version, otherwise they depend on the version.

	LENGTH **870 mm** 30 W	LENGTH **1150 mm** 40 W	LENGTH **1435 mm** 50 W
Item no. per version			
Rise-and-fall pendant	559.40tw/sd	55941tw/sd	55952tw/sd
Steel cable	559.4096tw/sd	5594196tw/sd	5595296tw/sd
Light			
Luminous flux	4,500 lm	6,000 lm	7,500 lm
Illuminance (50 cm)	5,400 lx		
Colour temperature	warm white to daylight white (2700-6500 Kelvin)		
Colour rendering	CRI > 90 (typ. 93)		
Dimming	1-100 % stepless		
Power	30 W	40 W	50 W
Design & material			
Dimensions (L × W × H)	870 × 60 × 79 mm	1150 × 60 × 79 mm	1435 × 60 × 79 mm
Weight	3.3 kg / 4.7 kg		
Colour	Silver grey RAL 9006		
Housing material	natural anodised aluminium		
Technology			
Supply voltage	220-240 V / 50-60 Hz		
Service life	50,000 h		
Protection class	IP 20		
Risk group	RG 0		
Operation, connection & mounting			
Switch	Multifunction button on the side of the luminaire head (ON/OFF/DIM and mode selection)		
Connection	Terminal blocks in the right ceiling canopy		
Mountings	depending on the selected option: height-adjustable rise-and-fall pendants 500-1500 mm or individually shortenable steel cable suspension		
Suspension	height-adjustable rise-and-fall pendants (black) / steel cable suspension		

Highlights

ADJUSTABLE LIGHT COLOUR

2,700-6,500 K

From warm white to daylight white thanks to Tunable White technology.

LED SERVICE LIFE

50,000 h

Calculated 25 years at 8 hours on 250 working days per year.

Steplessly dimmable

1-100 %.

Bright into the corners

Light at the workplace and brightening of the whole room.

Colour-stable when dimmed

No colour point shift when dimming.

Made in Germany

Developed and manufactured in Germany.

Clear design

High-quality materials that suit any room.


Low heat build-up

No heat load in the direction of light output, the luminaire stays cool.

Dimensions


All dimensions in mm.

CROSS-SECTION

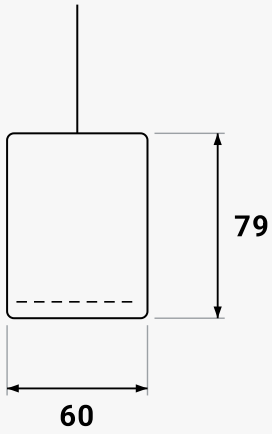

ght output at the bottom


LENGTH 870 MM · 30 W

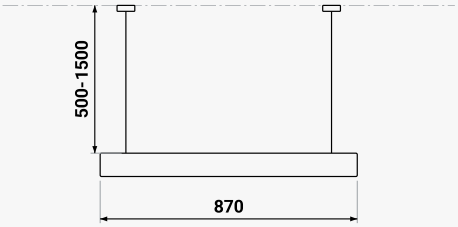

Rise-and-fall pendant 500-1500 mm or steel cable, can be shortened

LUMINAIRE (L × W × H)	WEIGHT
870 × 60 × 79 mm	**3.3 kg / 4.7 kg**


LENGTH 1150 MM · 40 W

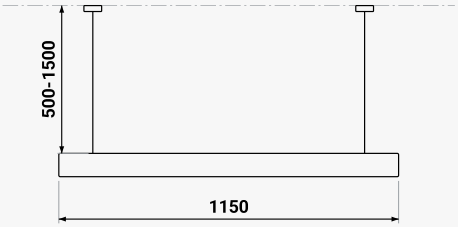

Rise-and-fall pendant 500-1500 mm or steel cable, can be shortened

LUMINAIRE (L × W × H)	WEIGHT
1150 × 60 × 79 mm	**3.3 kg / 4.7 kg**

LENGTH 1435 MM · 50 W

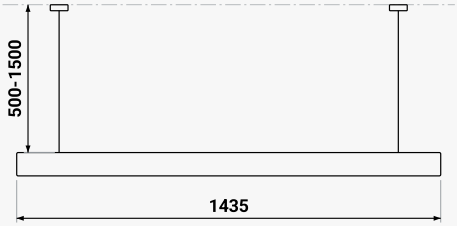

Rise-and-fall pendant 500-1500 mm or steel cable, can be shortened

LUMINAIRE (L × W × H)	WEIGHT
1435 × 60 × 79 mm	**3.3 kg / 4.7 kg**

Scope of delivery: selected suspension, LED light source

Contact

Questions about the office pendant luminaire TW?

We advise you personally, including lighting design for your workplace.

PHONE
+49 9723 9082788

EMAIL
info@rmd-leuchten.de

ADDRESS
Zum Weiherlein 16
97509 Kolitzheim, Germany

OPENING HOURS
Mon - Fri 9:00 am - 6:00 pm (CET)

PRODUCT PAGE OPEN