LED floor-standing luminaire

Basic

Mobile workplace lighting - set up, plug in, get started.



COLOUR RENDERING
CRI > 90

LIGHT COLOUR
4,000 K

SERVICE LIFE
50,000 h

Versions

7,150 lm · 60 W

○ **White**
ITEM NO. 1010394



● **Black**
ITEM NO. 1010393

Technical data

LED FLOOR-STANDING LUMINAIRE
Basic

Item no. per version

○ White	1010394
● Black	1010393

Light

Luminous flux	7,150 lm
Colour temperature	neutral white (4000 Kelvin)
Colour rendering	CRI > 90
Dimming	steplessly via rotary knob
Power	60 W

Design & material

Dimensions (L × W × H)	570 × 280 × 1950 mm
Weight	10 kg
Colour	White / Black

Technology

Service life	50,000 h
Protection class	IP 20
Indirect light share	with indirect light component
Beam angle	115°
Half-value angle	115 / 80 °
Glare rating	UGR 19

Operation

Operation	Rotary knob on the housing

Highlights

COLOUR RENDERING

CRI > 90

See colours naturally and reliably.

LED SERVICE LIFE

50,000 h

Calculated 25 years at 8 hours on 250 working days per year.

Glare-free at screen workstations

UGR ⩽ 19: suitable for screen workstations.

Direct and indirect light

Light on the workplace and onto the ceiling.

Steplessly dimmable

Steplessly via the rotary knob on the housing.

Without mounting

Simply set up and plug in.


Low heat build-up

No heat load in the direction of light output, the luminaire stays cool.


Dimensions

All dimensions in mm.

FRONT VIEW

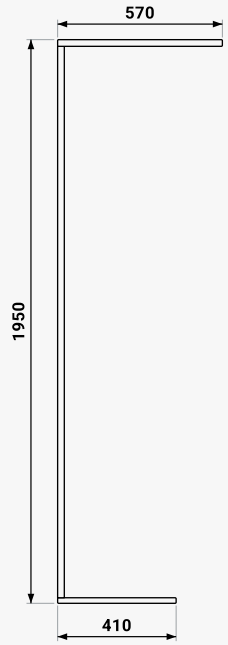

SIDE VIEW



ALL VERSIONS

LUMINAIRE (L × W × H)	WEIGHT
570 × 280 × 1950 mm	**10 kg**

Contact

Questions about the floor-standing luminaire Basic?

We advise you personally, including lighting design for your workplace.

PHONE
+49 9723 9082788

EMAIL
info@rmd-leuchten.de

ADDRESS
Zum Weiherlein 16
97509 Kolitzheim, Germany

OPENING HOURS
Mon - Fri 9:00 am - 6:00 pm (CET)

PRODUCT PAGE OPEN