LED table luminaire

Take 5

High-quality LED table luminaire for glare-free light with flexible mounting.



COLOUR RENDERING
CRI > 90

LIGHT COLOUR
4,000 / 5,500 K

ILLUMINANCE
up to 2,000 lx
at 50 cm

SERVICE LIFE
50,000 h

neutral white (4000 Kelvin)



Take 5

non-dimmable · table base	288-L9517
non-dimmable · table clamp	288-L9514
dimmable · table base	288-L9517sd
dimmable · table clamp	288-L9514sd

daylight white (5500 Kelvin)



Take 5

non-dimmable · table base	288-L9527
non-dimmable · table clamp	288-L9524
dimmable · table base	288-L9527sd
dimmable · table clamp	288-L9524sd

Technical data

Values per version. Values shaded grey apply to every version, otherwise they depend on the version.

	COLOUR TEMPERATURE **neutral white (4000 Kelvin)**	COLOUR TEMPERATURE **daylight white (5500 Kelvin)**
Item no. per version		
non-dimmable · table base	288-L9517	288-L9527
non-dimmable · table clamp	288-L9514	288-L9524
dimmable · table base	288-L9517sd	288-L9527sd
dimmable · table clamp	288-L9514sd	288-L9524sd
Light		
Luminous flux	2,000 lm / 2,400 lm	
Illuminance (50 cm)	1,680 lx / 2,000 lx	
Colour rendering	CRI > 90 (typ. 93)	
Dimming	non-dimmable / 1-100 % stepless	
Power	13.5 W	
Design & material		
Dimensions (L × W × H)	480 × 645 × 490 mm	
Weight	3 kg / 8.7 kg with table base	
Colour	Silver grey RAL 9006	
LED cover	Micro-prism diffuser plus additional high-tech diffuser film	
Articulated arm lengths	480 mm upper arm + 490 mm lower arm	
Joint type	Friction-joint arm	
Technology		
Supply voltage	220-240 V / 50-60 Hz	
Service life	50,000 h	
Protection class	IP 20	
Plug type	Schuko plug (CEE 7/7)	
Connection & mounting		
Connection	1.5 m PVC cable (transparent insulation)	
Mountings	Table base / table clamp	

Highlights

COLOUR RENDERING

CRI > 90

See colours naturally and reliably.

LED SERVICE LIFE

50,000 h

Calculated 25 years at 8 hours on 250 working days per year.

Less glare

Micro-prism diffuser plus diffuser film: even, low-glare light.

Optionally steplessly dimmable

1-100 %.

Friction joints with spring

Steplessly and easily adjustable, no sagging due to accidental mishandling.

Made in Germany

Developed and manufactured in Germany.


Low heat build-up

No heat load in the direction of light output, the luminaire stays cool.


Dimensions

All dimensions in mm.

SIDE VIEW

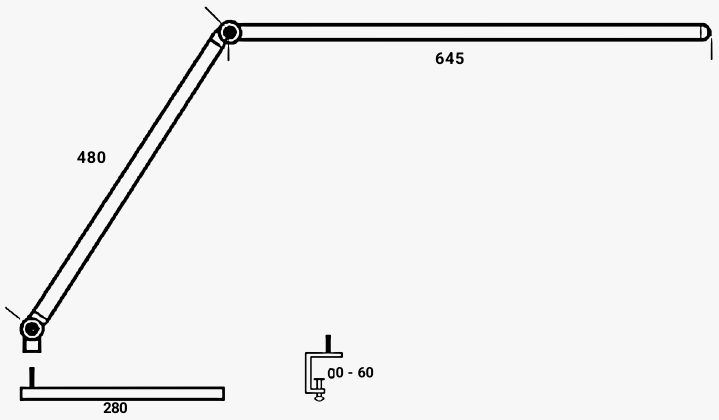

BASE FROM ABOVE

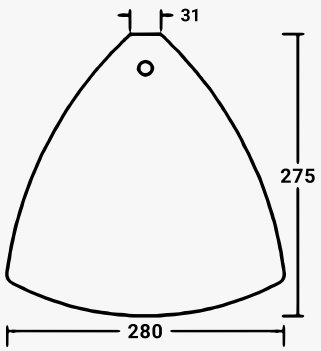

ALL VERSIONS

LUMINAIRE (L × W × H)	WEIGHT
480 × 645 × 490 mm	**3 kg / 8.7 kg with table base**

Scope of delivery: Table clamp, LED light source / incl. table base, LED light source

Contact

Questions about the table luminaire Take 5?

We advise you personally, including lighting design for your workplace.

PHONE
+49 9723 9082788

EMAIL
info@rmd-leuchten.de

ADDRESS
Zum Weiherlein 16
97509 Kolitzheim, Germany

OPENING HOURS
Mon - Fri 9:00 am - 6:00 pm (CET)

PRODUCT PAGE OPEN